


DATA SHEET

LR6/AA



Classification: Alkaline
 Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)
 Designation: IEC-LR6
 Nominal Voltage: 1,5 V
 Typical Capacity: 2700 mAh (Load: 43 ohms, Discharge Type: 24 h/d, End Voltage: 0,8 V, 21°C)
 Operating Temperature: -10 °C to 50 °C
 Typical Weight: 23,6 g
 Typical Volume: 8 cm³
 Shelf Life: 7 years

Dimensions:

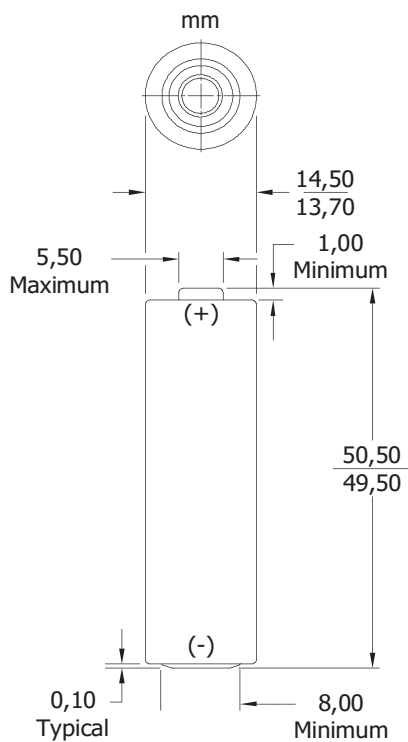

Capacities (after 12 months storage at 21 °C)

Discharge Type	Load	End Voltage (V)	Time	Applications
1 h/day	3,9 Ω	0,8	7,3 h	Motor, toys
4 m/h, 8 h/day	3,9 Ω	0,9	6,5 h	Portable lighting
1 h/8 h, 24 h/day	50 mA	1	46 h	Remote control
1 h/day	100 mA	0,9	22,5 h	Digital audio
1 h/day	250 mA	0,9	7,7 h	Digital audio
10 s/m, 1 h/day	1000 mA	0,9	490 pulses	Digital camera